




### Standard Features

- Fully Enclosed Wiring w/LED Lights
- Bolted Fenders
- Available in straight deck or beavertail
- Available with slide in or fold up ramps
- Stabilizer jacks standard on slide-in ramps
- High tensile steel I-beam crossmembers
- HSS Structural Tubing Frame
- HD Fir Decking
- Bolted Drop Leg Jacks
- Stake pockets and rub rail

### Specifications

<b>Axle:</b>	(2) 3,500 lb Lippert Spring	<b>Frame:</b>	5 X 2 HSS
<b>Suspension:</b>	Multi-Leaf Spring w/ Equalizer	<b>Ramp:</b>	Slide In or Flip Up, 2,500 lb
<b>Wheels:</b>	205/75R15 C Steel	<b>Crossmember:</b>	3" I-Beam 80 KSI
<b>Brakes:</b>	Electric Self Adjusting	<b>Tongue:</b>	4 X 2 HSS
<b>Jack:</b>	2,000 lb Top Wind Bolted	<b>Deck:</b>	HD Fir Plank
<b>Coupler:</b>	10,000 lb Stamped	<b>Electric Plug:</b>	7 Wire RV

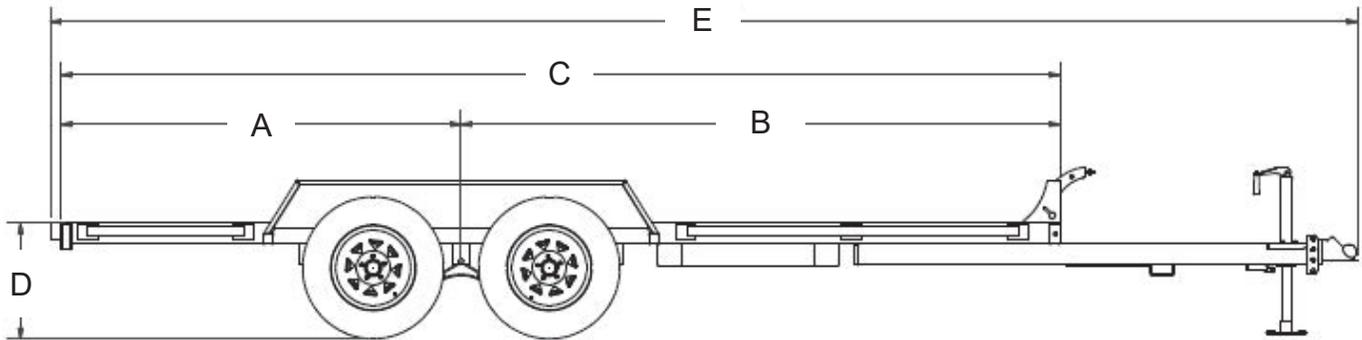

## Dimensions

Model	A	B	C	D	E
LBAT35-16	76 1/2"	115 1/2"	192"	21 3/4"	246 1/2"
LBAT35-18	85 1/2"	130 1/2"	216"	21 3/4"	270 1/2"
LBAT35-20	95 1/2"	144 1/2"	240"	21 3/4"	294 1/2"

### Width Between Fenders

84"

Model	Description	Net Weight	GVWR	Payload Cap.
LBAT35-16	16' 3,500 lb. Tandem Axle Black	1,590 lb	7,700 lb	6,110 lb
LBAT35-18	18' 3,500 lb. Tandem Axle Black	1,740 lb	7,700 lb	5,960 lb
LBAT35-20	20' 3,500 lb. Tandem Axle Black	1,890 lb	7,700 lb	5,810 lb



Specs are subject to change without notice. Please contact Southland Trailer Corp Product Specialist for price confirmation on all Products. - Revised June 2025